

BoscoLighting's GIT Recessed Downlight is a high powered LED downlight designed to light up your retail displays, events and large reception areas creating the impact your clients really desire.

While really bright, they are also very energy efficient. Our lights come with a L90 B10 rating, which means they are designed to stay brighter for longer, so your shop, reception area or foyer will retain its impact for many years.

## Features

- Range from 8W to 50W
- Easy installation
- LED Driver Included
- Supplied with Flex & Plug

## Applications

- Museums & galleries
- Retail shops
- Bars & restaurants
- Residential and commercial projects


## Downlight GIT



## Specs

Connect: AU Standard Flex & Plug  
Dimming: Various dimming options available on request

15°	24°	38°	60°
IP 44	>80 CRI	92 CRI	AC 200-240V
		3 Yrs Warranty	35000 @ L90 B10 Lifetime

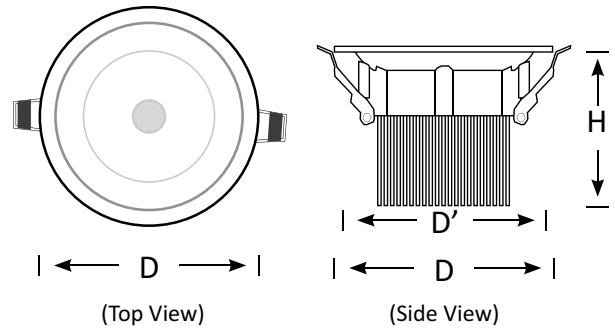

### BLDL-GIT-08

8W Recessed Downlight  
Luminous Flux (lm): 800  
CCT: Whites(3000K-5000K)  
Viewing Angle: 24°  
Dimensions (mm): D95\*H80  
Cutout(mm):D'75  
Weight(kg): 0.4



### BLDL-GIT-12

12W Recessed Downlight  
Luminous Flux (lm): 1200  
CCT: Whites(3000K-5000K)  
Viewing Angle: 24°/38°/60°  
Dimensions (mm): D115\*H116  
Cutout(mm): D'95  
Weight(kg): 0.6



### BLDL-GIT-20

20W Recessed Downlight  
Luminous Flux (lm): 2000  
CCT: Whites(3000K-5000K)  
Viewing Angle: 24°/38°/60°  
Dimensions (mm): D142\*H131  
Cutout(mm): D'125  
Weight(kg): 0.8



### BLDL-GIT-30

30W Recessed Downlight  
Luminous Flux (lm): 2700  
CCT: Whites(3000K-5000K)  
Viewing Angle: 24°/38°/60°  
Dimensions (mm): D160\*H133  
Cutout(mm): D'140  
Weight(kg): 1.2



### BLDL-GIT-40

40W Recessed Downlight  
Luminous Flux (lm): 3600  
CCT: Whites(3000K-5000K)  
Viewing Angle: 24°/38°/60°  
Dimensions (mm): D185\*H136  
Cutout(mm): D'160  
Weight(kg): 1.4



### BLDL-GIT-50

50W Recessed Downlight  
Luminous Flux (lm): 4500  
CCT: Whites(3000K-5000K)  
Viewing Angle: 24°/60°  
Dimensions (mm): D230\*H145  
Cutout(mm): D'200  
Weight(kg): 1.6