

## BLEX-TL010

Similar to other trimless profiles, BLEX-TL010 is designed to plaster in surfaces for a completely seamless look. At 14 mm deep with a light emitting surface of approx 20mm, the profile is sure to deliver a more elegant and dedicated linear effect.

Supplied as standard in 2m lengths. The extrusion can be recessed easily into walls or ceilings using a thin layer of plaster. We offer cut-to-length service as well. (MOQ may apply)

It can be fitted with one BoscoLighting SMD2835, SMD5050, SMD3528 or other LED strip for interior lighting.

\*LEDs and driver not included.

## Features

- Easy to cut to size or extend as needed
- Good heatsinking for LED longevity
- Default fitting colour: anodised silver

## Accessories


- 2 Metal End Caps per standard length
- Diffuser - Frosted
- Optional Joiner on request

## Product Specifications

Dimensions (mm): 1000\*73\*18.5

Cut-out(mm): 1000\*35\*16


## Installation Instruction



Recommended Installation:

- Step 1: Fix the trimless extrusion in minimum 16mm Plasterboard or Gyprock using metal screws to hold it in position or using plasterboard or drywall adhesives. Or make a cut-out into the ceiling or wall as per the required cut-out dimension, then fix the trimless extrusion in position.
- Step 2: Once done, patch over the mounting frame with stucco or plaster and paint and let it dry to finish then install strip and diffuser.

## Plaster-in Trimless Extrusion TL010

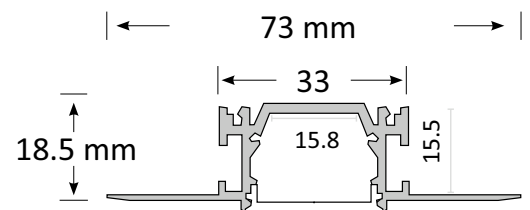

\*Mitre joint Customization Available

