

## BLEX-TL015

BLEX-TL015 is a Plaster-in Trimless profile designed to use in the ceiling-to-wall transition areas. Recessed easily into ceilings using a thin layer of plaster, this trimless profile can deliver a even light distribution and add a very soft ambience to the room.

Supplied as standard in 2m lengths. The high quality aluminium extrusion can be cut to length as your require. (MOQ may apply)

### Features

- Easy to cut to size or extend as needed
- Good heatsinking for LED longevity
- Recommended installation: Recessed in 13mm Plasterboard or Gyprock.
- Default fitting colour: powder coated white


### Accessories

- 2 Metal End Caps per standard length
- Diffuser - Frosted
- Optional Joiner on request



### Product Specifications

IP Rating	20
Dimensions (mm)	1000*94.4*34.5
Cut Out (mm)	1000*52
Weight (kg)	0.5
Warranty (yrs)	3

### Product Dimensions

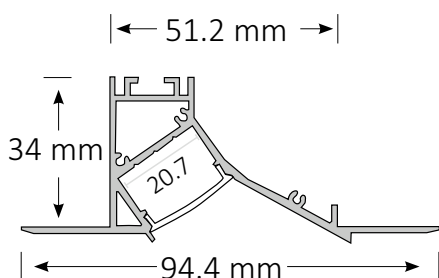

## Plaster-in Trimless Extrusion TL015

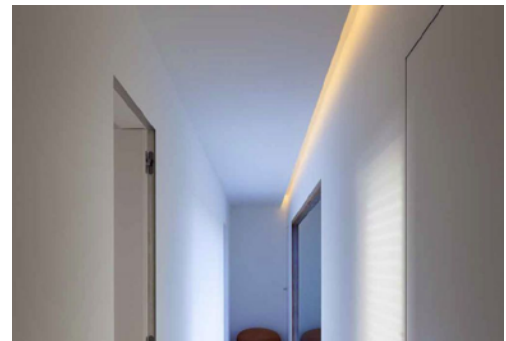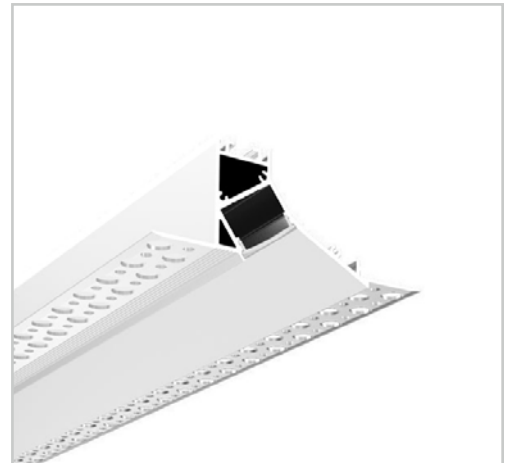

### Installation Instruction

