

BoscoLighting's TAM Slimline Flood Light features sleek design, designed to illuminate your residential and commercial exterior applications instantly. Supplied with flex and plug, they are easy to use, easy to mount and really bright.

Housing in durable aluminum, they are IP65 waterproof and can be integrated with motion detectors or left on all night at a fraction of the cost of traditional technology increasing security and safety.



Features

- An IP65 rating ensure that these lights are waterproof and suitable for indoor or outdoor use
- Maintenance free and quality build to protect against vibrations and ensure long lasting life
- Electrician friendly - Easy to install
- LED Driver Included
- Supplied with Flex & Plug

Applications

- Sporting locations including gymnasiums, indoor sporting halls and community centres
- Industrial factories, workshops and warehouses
- Supermarkets and exhibition centers
- Tunnels, billboards and swimming pools


Flood Light TAM

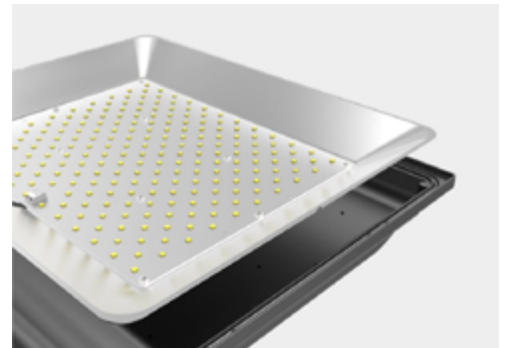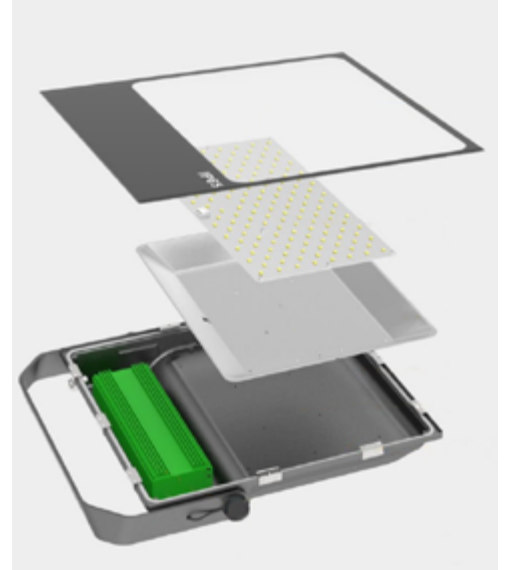

Specs

Connect: AU Standard Flex & Plug

Dimming: Various dimming options available on request

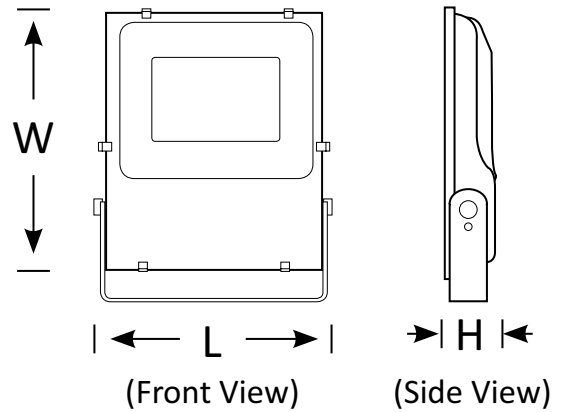

BLFL-TAM-10
10W Flood Light
Luminous Flux (lm): 980
CCT: Whites(3000K-6500K)
Dimensions (mm):L166*W116*H32
Weight(kg): 0.3



BLFL-TAM-20
20W Flood Light
Luminous Flux (lm): 1950
CCT: Whites(3000K-6500K)
Dimensions (mm):L217*W152*H40
Weight(kg): 0.8



BLFL-TAM-30
30W Flood Light
Luminous Flux (lm): 3150
CCT: Whites(3000K-6500K)
Dimensions (mm):L227*W167*H40
Weight(kg): 1



BLFL-TAM-50
50W Flood Light
Luminous Flux (lm): 5350
CCT: Whites(3000K-6500K)
Dimensions (mm): L315*W220*H50
Weight(kg): 1.8



BLFL-TAM-80
80W Flood Light
Luminous Flux (lm): 8800
CCT: Whites(3000K-6500K)
Dimensions (mm): L355*W245*H55
Weight(kg): 4.5



BLFL-TAM-100
100W Flood Light
Luminous Flux (lm): 10100
CCT: Whites(3000K-6500K)
Dimensions (mm):L403*W295*H60
Weight(kg): 5.4



BLFL-TAM-150
150W Flood Light
Luminous Flux (lm): 16000
CCT: Whites(3000K-6500K)
Dimensions (mm): L431*W330*H60
Weight(kg): 7.1



BLFL-TAM-200
200W Flood Light
Luminous Flux (lm): 21200
CCT: Whites(3000K-6500K)
Dimensions (mm): L471*W360*H60
Weight(kg): 8.0