



BoscoLighting's **TIM Flood Lights** feature superior, powerful heat dissipation capability with innovative heatsinks design. It is perfect to illuminate your medium to large scale industrial or commercial space instantly. Supplied with flex and plug, they are easy to use, easy to mount and really bright.

Ranging from 30W to 200W, they are IP65 waterproof and can be integrated with motion detectors or left on all night at a fraction of the cost of traditional technology increasing security and safety.

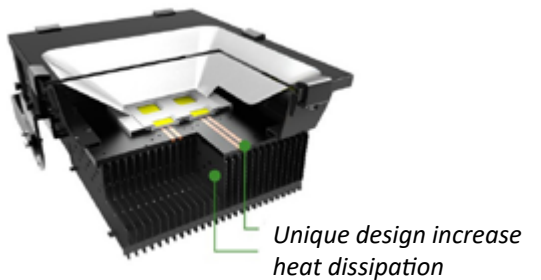

Flood Light TIM

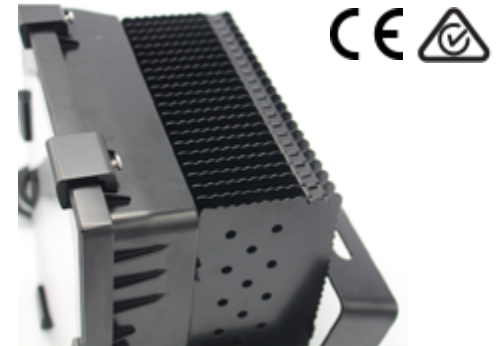

Features


- An IP65 rating ensure that these lights are waterproof and suitable for indoor or outdoor use
- Maintenance free and quality build to protect against vibrations and ensure long lasting life
- Electrician friendly - Easy to install
- LED Driver Included
- Supplied with Flex & Plug

Applications

- Sporting locations including gymnasiums, indoor sporting halls and community centres
- Industrial factories, workshops and warehouses
- Supermarkets and exhibition centers
- Tunnels, billboards and swimming pools




Specs

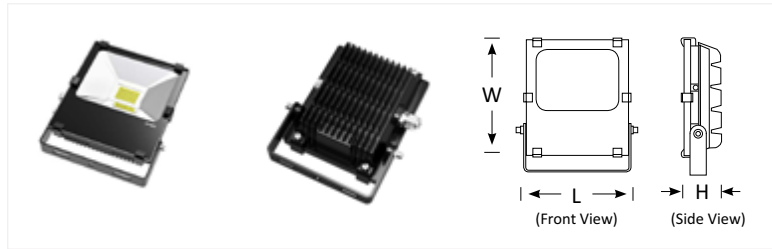


BLFL-TIM-30

30W Flood Light
Luminous Flux (lm): 3300
CCT: Whites(3000K-6500K)
Connect: AU Standard Flex & Plug
Dimming: Various dimming options available on request
Dimensions (mm): L191*W190*H63
Weight(kg): 1.5

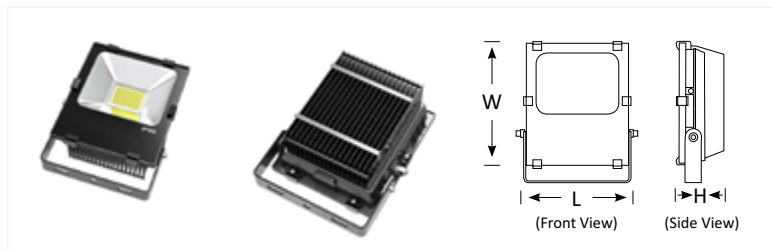


BLFL-TIM-50

50W Flood Light
Luminous Flux (lm): 5500
CCT: Whites(3000K-6500K)
Connect: AU Standard Flex & Plug
Dimming: Various dimming options available on request
Dimensions (mm): L200*W234*H95
Weight(kg): 2.8

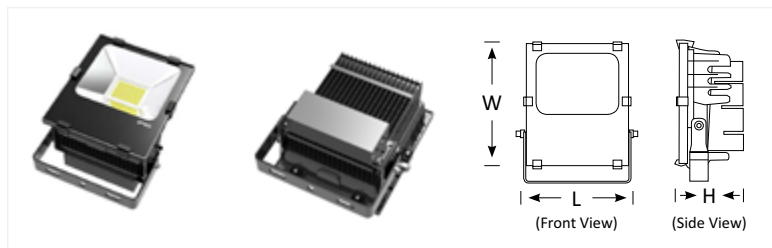


BLFL-TIM-70

70W Flood Light
Luminous Flux (lm): 7700
CCT: Whites(3000K-6500K)
Connect: AU Standard Flex & Plug
Dimming: Various dimming options available on request
Dimensions (mm): L200*W234*H129
Weight(kg): 3.7

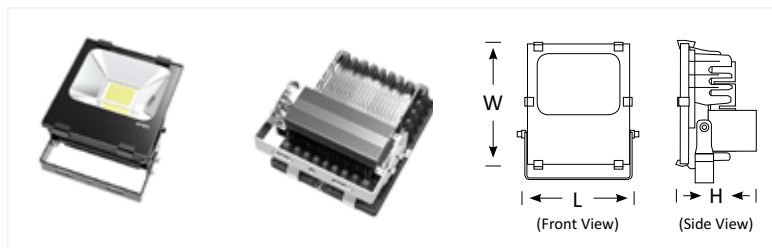


BLFL-TIM-100

100W Flood Light
Luminous Flux (lm): 11000
CCT: Whites(3000K-6500K)
Connect: AU Standard Flex & Plug
Dimming: Various dimming options available on request
Dimensions (mm): L250*W270*H178
Weight(kg): 5.6

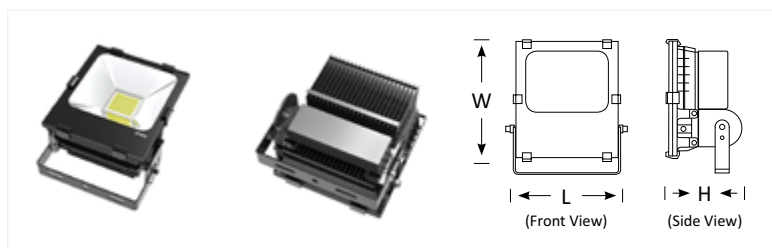

BLFL-TIM-150

150W Flood Light
Luminous Flux (lm): 16500
CCT: Whites(3000K-6500K)
Connect: AU Standard Flex & Plug
Dimming: Various dimming options available on request
Dimensions (mm): L274*W315*H190
Weight(kg): 6.0

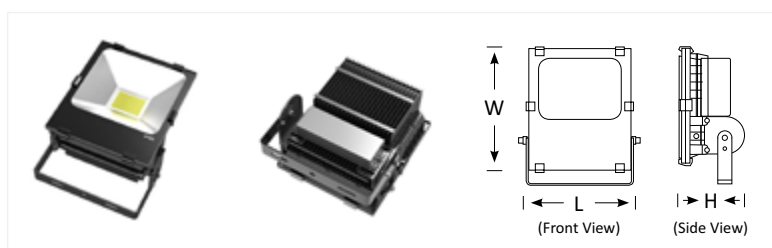

BLFL-TIM-200

200W Flood Light
Luminous Flux (lm): 22000
CCT: Whites(3000K-6500K)
Connect: AU Standard Flex & Plug
Dimming: Various dimming options available on request
Dimensions (mm): L320*W380*H200
Weight(kg): 8.8