


The GG78 Series is perfect for retail locations where a specific point requires more attention or to remove shadows. Our GG78 Series is to make products pop and attract customers, highlighting premium goods and displays. Available in a range of power levels, this product can also be used for art galleries and lighting wall hangings.

With our lights your customers won't be looking up and wondering why the bulb hasn't been changed. They will keep your products bright and in your customer's eye. Our products are easy to install, creating a pleasant feel good atmosphere. They are bright and comfortable and are therefore perfect for use in entrance and waiting areas too.

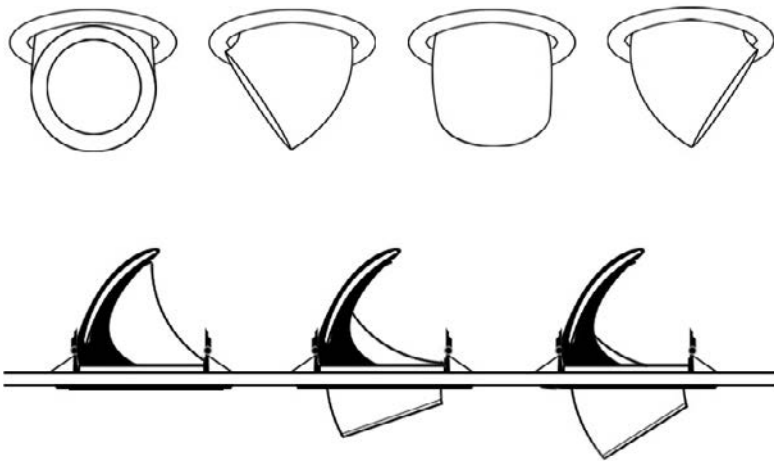


Features

- Aluminium die casting alloy housing
- Easy installation
- LED Driver Included
- Supplied with Flex & Plug
- Adjustable Angle: Horizontal 350°/ Vertical 78°
- CRI 92 available for anywhere extreme colour accuracy is required

Applications


- Museums & galleries
- Retail shops
- Bars & restaurants
- Residential and commercial projects

Gimble Downlight GG78

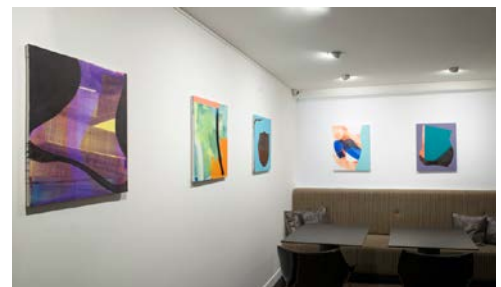

Specs

Connect: AU Standard Flex & Plug
Dimming: Various dimming options available on request

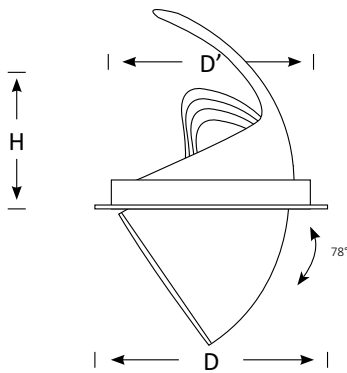

24°	60°	IP 42
AC 100-240V	>80 CRI	92 CRI
3 Yrs Warranty	35000 @ L90 B10 Lifetime	



BLSL-GG78-07

7W Shop Light
Luminous Flux (lm): 700
Viewing Angle: 24°
CCT: Whites(3000K, 4000K, 5000K)
Dimensions (mm): D90*H75
Cutout(mm): D'80
Weight(kg): 0.2



BLSL-GG78-15

15W Shop Light
Luminous Flux (lm): 1500
Viewing Angle: 24°/60°
CCT: Whites(3000K, 4000K, 5000K)
Dimensions (mm): D114*H95
Cutout(mm): D'100
Weight(kg): 0.4



BLSL-GG78-25

25W Shop Light
Luminous Flux (lm): 2500
Viewing Angle: 24°/60°
CCT: Whites(3000K, 4000K, 5000K)
Dimensions (mm): D138*H125
Cutout(mm): D'128
Weight(kg): 0.8



BLSL-GG78-35

35W Shop Light
Luminous Flux (lm): 3150
Viewing Angle: 24°/60°
CCT: Whites(3000K, 4000K, 5000K)
Dimensions (mm): D168*H145
Cutout(mm): D'155
Weight(kg): 1.1



BLSL-GG78-40

40W Shop Light
Luminous Flux (lm): 3600
Viewing Angle: 24°/60°
CCT: Whites(3000K, 4000K, 5000K)
Dimensions (mm): D190*H165
Cutout(mm): D'175
Weight(kg): 1.5