
lighting wall hangings.

The **GG78 Series** is perfect for retail locations where a specific point requires more attention or to remove shadows. Our GG78 Series is to make products pop and attract customers, highlighting premium goods and displays. Available in a range of power levels, this product can also be used for art galleries and

With our lights your customers won't be looking up and wondering why the bulb hasn't been changed. They will keep your products bright and in your customer's eye. Our products are easy to install, creating a pleasant feel good atmosphere. They are bright and comfortable and are therefore perfect for use in entrance and waiting areas too.



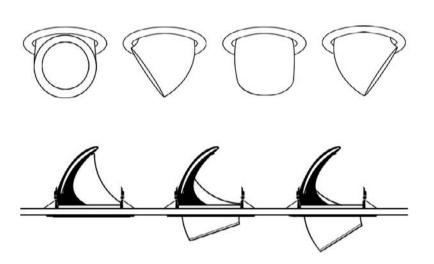

Features

- Aluminium die casting alloy housing
- Easy installation
- LED Driver Included
- Supplied with Flex & Plug
- Adjustable Angle: Horizontal 350°/ Vertical 78°
- CRI 92 available for anywhere extreme colour accuracy is required

Gimble Downlight GG78








Applications

- Museums & galleries
- Retail shops
- Bars & restaurants
- Residential and commercial projects

Specs

Connect: AU Standard Flex & Plug Dimming: Various dimming options

available on request





























BLSL-GG78-07

7W Shop Light Luminous Flux (lm): 700 Viewing Angle: 24° CCT: Whites(3000K, 4000K, 5000K) Dimensions (mm): D90*H75 Cutout(mm): D'80 Weight(kg): 0.2



BLSL-GG78-15

15W Shop Light Luminous Flux (lm): 1500 Viewing Angle: 24°/60° CCT: Whites(3000K, 4000K, 5000K) Dimensions (mm): D114*H95 Cutout(mm): D'100 Weight(kg): 0.4



BLSL-GG78-25

25W Shop Light Luminous Flux (lm): 2500 Viewing Angle: 24°/60° CCT: Whites(3000K, 4000K, 5000K) Dimensions (mm): D138*H125 Cutout(mm): D'128 Weight(kg): 0.8



BLSL-GG78-35

35W Shop Light Luminous Flux (lm): 3150 Viewing Angle: 24°/60° CCT: Whites(3000K, 4000K, 5000K) Dimensions (mm): D168*H145 Cutout(mm): D'155 Weight(kg): 1.1



BLSL-GG78-40

40W Shop Light Luminous Flux (lm): 3600 Viewing Angle: 24°/60° CCT: Whites(3000K, 4000K, 5000K) Dimensions (mm): D190*H165 Cutout(mm): D'175

Weight(kg):1.5