

BoscoLighting's TETRIS Linear Downlight Series is designed to minimise glare and add style to your ceilings. Perfect for high-end residential projects or commercial applications. Available in a range of power levels, this simple fitting is suitable for cabinet lighting too.

Our products are easy to install, creating a pleasant feeling and good atmosphere.

*Trimless Version is newly added, please go to website to see the full range.



Features

- White trim with black reflector
- Easy installation
- LED Driver Included
- Supplied with Flex & Plug
- Available in 15°, 30°, 45° beam angle options
- CRI 92 available for anywhere extreme colour accuracy is required

Applications

- Museums & galleries
- Retail shops
- Bars & restaurants
- Residential and commercial projects

Recessed Downlight TETRIS



1x2W



2x2W



5x2W



10x2W




15x2W

Specs

Connect: AU Standard Flex & Plug
Dimming: Non-dim, Trailing Edge, DALI

15°	30°	45°
IP 44	>80 CRI	92 CRI
AC 220-240V	3 Yrs Warranty	35000 @ L90 B10 Lifetime

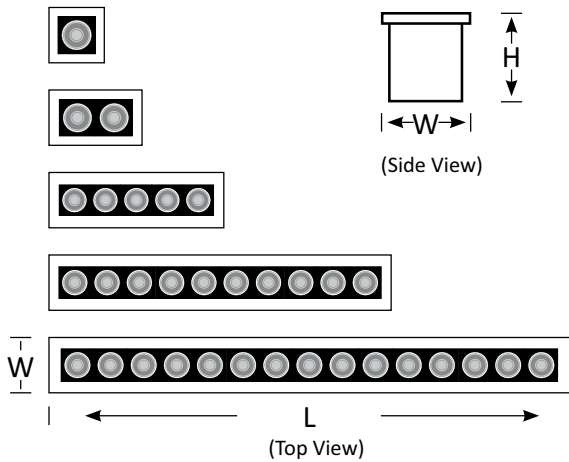

BLSL-TETRIS-02

2W Mini Downlight
Luminous Flux (lm): 200
CCT: Whites(3000K-5000K)
Dimensions (mm): L45*W45*H49
Cutout(mm): L'37*W'37
Dimming: Non-dim
Weight(kg): 0.12



BLSL-TETRIS-04

4W Twin Spot Light
Luminous Flux (lm): 400
CCT: Whites(3000K-5000K)
Dimensions (mm):L75*W45*H49
Cutout(mm): L'65*W'37
Dimming: Non-dim, Trailing Edge, DALI
Weight(kg): 0.24



BLSL-TETRIS-10

10W Linear Wall Washer Downlight
Luminous Flux (lm): 1000
CCT: Whites(3000K-5000K)
Dimensions (mm): L147*W45*H49
Cutout(mm): L'137*W'37
Dimming: Non-dim, Trailing Edge, DALI
Weight(kg): 0.35



BLSL-TETRIS-20

20W Linear Wall Washer Downlight
Luminous Flux (lm): 2000
CCT: Whites(3000K-5000K)
Dimensions (mm): L280*W45*H49
Cutout(mm): L'270*W'37
Dimming: Non-dim, Trailing Edge, DALI
Weight(kg): 0.54



BLSL-TETRIS-30

30W Linear Wall Washer Downlight
Luminous Flux (lm): 2700
CCT: Whites(3000K-5000K)
Dimensions (mm): L415*W45*H49
Cutout(mm): L'405*W'37
Dimming: Non-dim, Trailing Edge, DALI
Weight(kg):0.76