

Surface Mounted Light LUKA


This low glare adjustable square downlight can be surface mounted to modern architectural or commercial applications.

The spotlight features Black or White powdercoated aluminium housing, offers 355 degree rotation and 80 degree tilt.

With an integral LED driver, this surface-mounted light can be easily installed on ceilings or wherever stylish design is required.



Product Code	BLSM-LUKA-12
Power (W)	12
Luminous Flux(lm)	1200
CCT	Warm White, Neutral White, Cool White (3000K-6000K)
Connect	Insulated Cable
Dimming Options	Non-dim*
Dimensions(mm)	L79*W79*H110
Weight(kg)	0.3

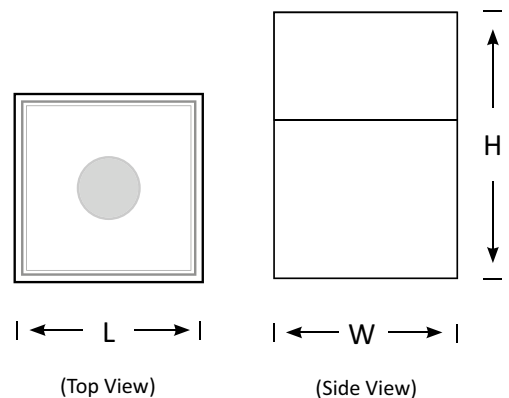

*For any other dimming request, drivers may not fit within the fitting, supplied with an external driver.