

BoscoLighting's Cylinder Outdoor Wall Lights are a great way to elegantly light up your corridors and building exteriors.

Housed in premium aluminium body with black or grey powder coated finish, this LED wall light is suitable for the most severe weather conditions.

Perfect for security, mood and walkways lighting, this cylinder wall light can be used for cafes, homes and courtyards!

Contact our lighting specialist for more information! Samples available upon request.

## Features

- Fitting colour: black or grey
- LED driver included
- IP65 rating, weather proof
- IK08 rating, durable against moderate mechanical impacts

## Customisation Options

- may be subject to minimum order quantities

- Fitting colour can be customised
- Colour temperature options can be RGB colour changing or single colours



## Wall Light (UpDown) CYL




## Specs

Connect: Insulated Cable


Dimming: Non-dim\*

Lifetime: 35,000 hours @ L90 B10

\*For any dimming request, drivers may not fit within the fitting, supplied with an external driver.

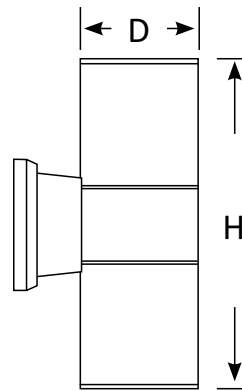

(Side View)



(Front View)




### BLWL-CYL-03X2

3W\*2 Updown wall light  
Luminous Flux (lm): 600  
CCT: Whites(3000K-6000K)  
Dimensions (mm): D65\*H260  
Weight(kg): 0.7



### BLWL-CYL-06X2

6W\*2 Updown wall light  
Luminous Flux (lm): 1200  
CCT: Whites(3000K-6000K)  
Dimensions (mm): D90\*H260  
Weight(kg): 1.18

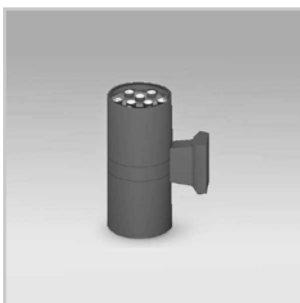

### BLWL-CYL-09X2

9W\*2 Updown wall light  
Luminous Flux (lm):1800  
CCT: Whites(3000K-6000K)  
Dimensions (mm):D110\*H300  
Weight(kg): 1.65



### BLWL-CYL-12X2

12W\*2 Updown wall light  
Luminous Flux (lm): 2400  
CCT: Whites(3000K-6000K)  
Dimensions (mm): D130\*H300  
Weight(kg): 1.85



### BLWL-CYL-18X2

18W\*2 Updown wall light  
Luminous Flux (lm): 3600  
CCT: Whites(3000K-6000K)  
Dimensions (mm): D145\*H300  
Weight(kg): 2.3



### BLWL-CYL-24X2

24W\*2 Updown wall light  
Luminous Flux (lm): 4800  
CCT: Whites(3000K-6000K)  
Dimensions (mm): D180\*H400  
Weight(kg): 2.7